

# An Experimental Guideline to Manufacture Micro-Impeller using Micro-Milling Process

*by* Dede Lia Zariatn

---

**Submission date:** 21-May-2018 12:26PM (UTC+0700)

**Submission ID:** 966562195

**File name:** ne\_to\_Manufacture\_Micro-Impeller\_using\_Micro-Milling\_Process.pdf (508.13K)

**Word count:** 2677

**Character count:** 15484

11  
**An Experimental Guideline to Manufacture Micro-Impeller  
using Micro-Milling Process**

ICOMM  
2014  
No.

11  
G. Kiswanto, D.L Zariatn, A.S Baskoro, Jos Istiyanto

*Department of Mechanical Engineering, Universitas Indonesia*

---

**Abstract**

1  
The objective of this research is to contribute an experimental guideline to manufacture micro-impellers by micro-milling process. This guideline is composed by analyzing and resuming the machining result that performed this research and related findings from other published journals. Numbers of machining process were performed in order to see the feasibility to produce micro-impellers. There are three important aspects that must be considered for manufacturing a micro-impeller, which are the geometric design of the micro-impeller, optimum cutting parameters and machining strategy to manufacture pre-eminent micro-impeller. The capability of available commercial CAD/CAM system to design micro-impeller is found adequate to confirm the design requirement in certain range of dimension. The constraints to manufacture micro-impeller such as dimensional tolerance, burrs occurrence, and work piece deflection must be considered appropriately. Indeed, this paper is an experimental reference to plan manufacturing process for micro-impeller or other micro-product.

**Keywords:** micro-milling, micro-impeller, cutting parameter.

---

**1. Introduction**

The demand of micro technology to produce various micro-products such as micro-impeller is increasing. Micro-impeller consists of number of blades which might have a complex shape. Several methods have been used to produce micro-impeller successfully such as Electro Discharge [1], photolithography with ultra-thick photo resist (SU-8 3000) [2], LIGA process for resin material [3], mold Shape Deposition Manufacturing (SDM) for silicon nitride material [4] and micro-milling process [5] [6]. Among these methods, 5-axis micro-milling is a preferable method to produce micro-impeller with complex shape of blades.

Micro-milling is a scaling down technology from macro/conventional milling process; however in some circumstances, it has its own characteristics which differ with macro-milling process due to its size-effect [7] [8] [9]. Many researchers investigated the characteristics of micro-milling process and a lot of experiments were done to understand the behavior of micro-milling process. However, the information about micro-milling technology especially to produce a certain product is still scattered. There is no integrated reference or guideline about how to develop a micro-product such as a micro-impeller.

In this paper, a guideline about micro-milling process that related to micro-product is explained in detail, in terms of design feasibility and constraints, planning the machining strategy by using commercial CAD/CAM system, and cutting parameter selection. Several of cutting experiments to produce micro-impeller were performed to investigate and verify the information. This integrated guideline emphasizes the knowledge of micro-milling process. The discussion is presented in three main categories which are the micro-impeller design constraints, machining strategy, and cutting parameter selection.

**2. Methods**

There are two approaches used to compile the guideline, which are literature review and experimental analysis. The first approach is by resuming important and relevant information from journals or research reports. All information in the journals was classified into three aspects which are the design constraints, machining strategy and cutting parameter selection. The design constraints to produce micro-impeller were investigated throughout the reviewed journals. Journals that discussed about thin wall and its problems were summarized. The practical cutting parameters which applied in the experiment, such as work piece material, tool material, tool geometry and tool coating, cutting speed, feed-rate, the effect of tool ware, surface roughness and burr characteristic are concluded. These practical cutting parameters are tabled and categorized based on work piece material. However, there is a lack of information about the machining strategy for micro-milling process, thus must be further investigated by the second approach which is performing experiments to produce micro-impeller.

The investigation begins from design to the machining process. An integrated available commercial CAD/CAM system is used to design micro-impeller. The capability and reliability of CAD/CAM system to design micro-impeller is analyzed. The machining strategy, such as the type of operation, cutting direction, cutting patterns, engage and retract strategy have to be determined appropriately, since it influence the product quality and effectiveness of the micro-milling process. Furthermore, the cutting parameter must be selected by considering the literatures and the optimum cutting parameter applied in the preliminary experiment of this research. It is necessary to select the optimum cutting parameter for the best result, but machine capability to reach certain cutting parameters such as spindle speed must be considered.

In this research, micro-milling process is performed on a

miniaturized micro-milling machine, Hadaia Micromill-5X, as shown in Fig.1. Various tools with diameters of 0.1 and 0.2 mm are used to produce micro-impeller from AA7075 material. The micro-impeller is designed with a diameter of 2 mm and 3 mm, and with a blade thickness of 10  $\mu\text{m}$  and 50  $\mu\text{m}$ .

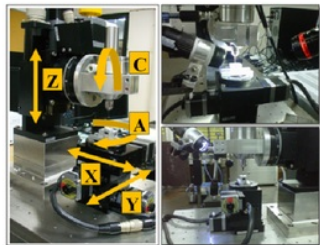


Fig.1. Micro-milling machine, Hadaia micromill-5X

### 3. Design Constraint

Impeller is a main part of a compressor which is designed to transfer energy or increase fluid pressure. Impeller is designed by calculating several parameters such as fluid flow rate, discharge velocity, total head change, etc., to conform the desired working capacity. The result of calculation defines the impeller geometry and dimension. However, due to some shortage of micro technology, it is necessary to acknowledge the capability of micro-milling process on producing micro-impeller.

The most important obstacle in designing micro-impeller is to define the acceptable blade thickness. Blade has the same shape of thin-wall that gather around forming a micro-impeller. Li et al [10] proved that peripheral micro-milling process could produce 8  $\mu\text{m}$  thicknesses of thin-wall, but with inadequate quality. The proper quality of thin-wall with a thickness of 14  $\mu\text{m}$  could be obtained by performing the cutting sequence proposed in the research.

Due to the complexity to design an impeller, CAD software is generally used to assist the design process. Available CAD software is not prepared for design micro-parts exclusively. There are few things need to be considered during the design phase, especially to generate extra complex thin-wall of micro-blades.

Various micro-impellers were designed using an available CAD/CAM system. An integrated CAD/CAM system is chosen, because the simplicity to transfer the part designs into manufacturing process design. Transferring micro-part design from different CAD and CAM system might result in misinterpretation of data points.

### 4. Machining Strategy

Complex product such as micro-impeller requires a good planning regarding the tool movement, cutting direction and cutting sequences, known as machining strategy. Machining strategy is identical to tool path generation. Brinksmeier et al [16] stated that commercially available CAM tools was not suitable for tool path generation of ultra-precise micro-milling machine, due to the lack of machine kinematic in commercial CAM software. However, in this research, a

kinematic calculation and post-processor was developed to overcome the problem. One of post-processing tasks is to interpret the data point in the CL file and transform it into appropriate command to control the micro-milling machine movement. Thus, the commercial CAM system can be used to generate the micro-part tool path. It is found that, with some considerations, machining strategy developed using commercial CAD/CAM system is satisfying, according to shape and dimension comparison between design and machined micro-impeller.

Despite of a special feature to design impeller is available in an integrated CAD/CAM system, it considers difficult to imposing the micro-impeller design in micro dimension. Therefore, skill to operate the CAD/CAM system to generate a tool path is highly needed. Some parameter such as feed and speed, cut direction, tolerance, smoothing, etc. needs to be justified. To produce minimum burr, conventional or up-milling cutting must be selected. Set the minimum value of intol and outtol in Tolerance. This setting affects the number of data point generate by the CAM system. More data point is produced within minimum tolerance. Although it needs more computing time, the computer capability still can pursue the requisites.

### 5. Cutting Parameters

Cutting parameter such as depth per-cut, cutting speed, and feed-rate is generally defined based on the work piece material, cutting tool and type of process (i.e. roughing, semi-finishing or finishing). Tool with diameter less than 2 mm is classified as a micro tool. It has a similarity of material, geometry and coating with conventional/macro tool, but in a smaller dimension. The small size of the tool makes it very difficult to inspect with naked eyes. Rejected tool could send to the customer coincidentally. Random inspection of available micro-tool was performed using SEM. It is found that one of carbide micro tool with a diameter of 0.1 mm is not in acceptable condition, as shown in Fig. 2. It seems that some substance, whether the tool coating or excessive tool material is covering the cutting tool surface.

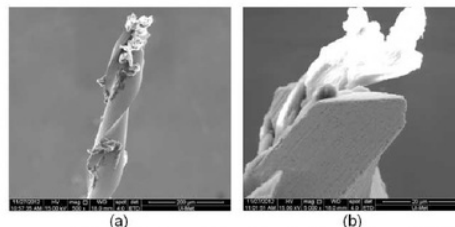


Fig. 2 Unacceptable micro-tool conditions (a) 500X (b) 5,000X

Recommended cutting parameter is commonly provided by the tool manufacturer. However, sometimes the capability of micro-milling machine cannot comply with the manufacturer recommendation. Thus, practical reference of cutting parameters is needed. This practical reference is compiled and tabled from other published experiment reports and journals.

Fig. 3 shows a range of spindle speed and feed-rate that applied to various work piece material, which is collected from journals. It describes that most of the micro-milling processes were performed with spindle speed less than 100,000 RPM, and feed-rate less than 640 mm/min. Meanwhile, Fig. 4 shows



the range of depth per-cut that applied in micro-milling process, which are generally smaller than 0.5 mm.

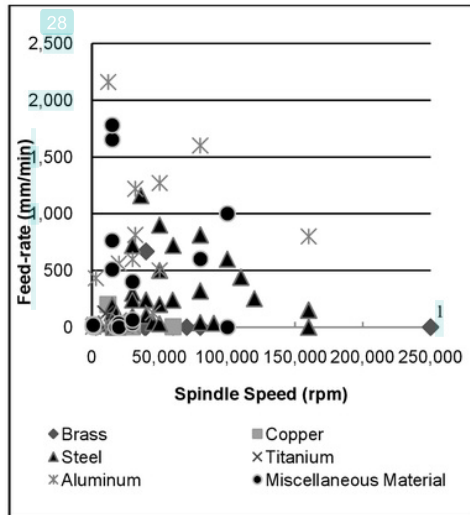


Fig.3.The range of spindle speed and feed-rate for various workpiece materials.

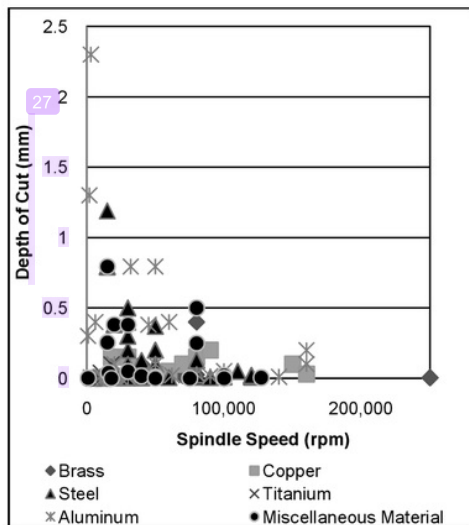


Fig.4.The range of depth per-cut and spindle speed for various workpiece materials.

Several literatures explained that the cutting parameter affects tool wear [11] [12], surface roughness [13] and burr formation [14] [15]. It is true that improper selection of cutting parameter will result in poor quality of the micro-impeller. One of the crucial problems in micro-milling is burr occurrences. Burr is a result of improper cutting parameter selection or tool wear. Micro-burr aggravates the micro-impeller quality. Fig.5. shows a 2 mm diameter of micro-impeller which covers with burr. The micro-impeller was manufactured with 0.1 mm diameter of carbide nACro coated flat end-mill tool which

has two flutes. The depth per-cut, spindle speed and feed-rate are 0.01 mm, 80,000 RPM, and 60 mm/min, respectively.

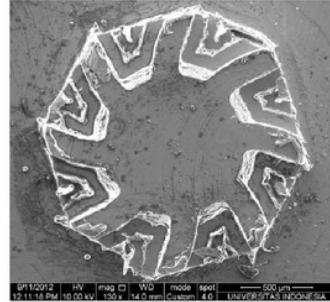


Fig.5. Micro-impeller with diameter of 2 mm developed with depth per-cut, spindle speed and feed-rate of 10 μm, 80,000 RPM, and 60 mm/min, respectively.

In order to find the optimum cutting parameter, cutting experiments was performed to investigate the suitability cutting parameters for AA7075. This data of cutting parameter is used as a reference to perform the following machining process to produce satisfactory micro-impeller. Fig.6. shows an adequate quality of 3 mm diameter micro-impeller. Ball-nose Mega-T coated carbide tools with diameters of 0.2 mm were used.

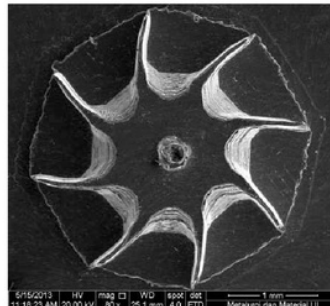


Fig.6. Micro-impeller with diameter of 3 mm developed with depth per-cut, spindle speed and feed-rate of 10 mm, 70,000 RPM and 30 mm/min, respectively.

## 6. Conclusions

This paper gives comprehensive reference about how to manufacture micro-impeller using micro-milling technology. There are three important aspects must consider while manufacturing micro-impeller, which are the design constrain that related to size and shape of blade, selection of optimum cutting parameter that enhance the quality of the micro-impeller, and determination of machining strategy when using available integrated CAD/CAM system.

The capability of CAD software and working range of micro-milling machine must consider when designing complex shapes of micro-impeller. Despite of there are some constraints in commercially available CAD/CAM system that related to minimum dimension and the complexity of blade, an integrated CAD/CAM system was proven to be an adequate tool to design micro-impeller. Integrated CAD/CAM system is also satisfactory in planning the machining strategy.

Occasionally, recommendation of cutting parameters

from the tool manufacturer cannot be applied, due to limitations of the micro-milling machine. Therefore, a collection of practical cutting parameter to produce micro-impeller with a particular quality of surface roughness and minimal burr is needed. The list of practical cutting parameters is proven to be an effective reference and guideline in defining cutting parameter and give an adequate result of the micro-impeller.

#### Acknowledgements

The authors wish to thank Prof. Tae Jo Ko (of Yeungnam University, Korea) and Balai Mesin Perkakas Teknik Produksi dan Otomasi – Balai Pengkajian dan Penerapan Teknologi MEPPPO-BPPT (Center for Machine Tools, Production and Automation – Agency for the Assessment and Application of Technology), Serpong, Indonesia for the contribution in this research.

#### References

- [1] K Liu et al, "High Precision Manufacturing Of An Ultra Miniature Ceramic Gas Turbine Impeller," in *Proceedings of Power MEMS 2008+ microEMS2008*, Sendai, Japan, 2008.
- [2] Jan Peirs et al, "A microturbine for electric power generation," *Sensors and Actuators*, vol. 113, no. 1, pp. 86-93, June 2004.
- [3] Satoshi Mor et al, "Method for Fabricating Micromachine Componen of Resin," US2009/0035706 A1, February 5, 2009.
- [4] James P. Johnston et al, "Microscale Radial-Flow Compressor Impeller Made of Silicon Nitride: Manufacturing and Performance," *ASME Journal Of Engineering For Gas Turbines And Power*, 2002.
- [5] J.H. Lee et al, "Novel forging technology of a magnesium alloy impeller with twisted blades of micro-thickness," *Manufacturing Technology*, vol. 57, pp. 261-264, 2008.
- [6] Yoshimi Takeuchi, "Multi-Axis Control Ultraprecision Micromilling," *Key Engineering Materials*, vol. 447-448, pp. 801-805, 2010.
- [7] Tao Zhang et al, "Influence of size effect on burr formation in micro cutting," *International Journal Advance Manufacturing Technology*, 2013.
- [8] A.J Mian et al, "Identification of factors that dominate size effect in micro-machining," *International Journal of Machine Tool and Manufacture*, vol. 51, no. 5, pp. 383-394, May 2011.
- [9] Dirk Biermann and Philip Kahnis, "Analysis and simulation of size effects in micro-milling," *Production Engineering*, vol. 4, pp. 25-34, 2010.
- [10] P Li et al., "Micromilling of thin ribs with high aspect Ratios," *Journal Of Micromechanics And Microengineering*, vol. 20, p. 115013 (10pp), 2010.
- [11] W.Y. Bao and I.N Tansel, "Modeling micro-end-milling operations. Part III : influence of tool wear," *International Journal of Machine Tools & Manufacture*, vol. 40, pp. 2193-2211, 2000.
- [12] Mohammad Malekian et al, "Tool wear monitoring of micro-milling operations," *Journal of Materials Processing Technology*, vol. 209, pp. 4903-4914, 2009.
- [13] Se'bastien Seguy et al, "Surface roughness variation of thin wall milling, related to modal interaction," *International Journal of Machine Tools & Manufacture*, vol. 48, pp. 261-274, 2008.
- [14] M. J. Chen et al, "Research on the modeling of burr formation process in micro-ball end milling operation on Ti-6Al-4V," *International Journal of Advance Manufacturing Technology*, vol. 62, pp. 901-912, 2012.
- [15] Kiha Lee and David A. Dorndfeld, "Micro-Burr Formation and Minimization trough Process Control," University of California, Berkeley, 2002-2004.
- [16] E. Brinksmeier et al, "Tool path generation for ultra-precision machining of free-form surfaces," *Production Engineering*, vol. 2, pp. 241-246, 2008.
- [17] J.C. Aurich et al., "Burrs- Analysis, control and removal," *CIRP Annals - Manufacturing Technology*, vol. 58, pp. 519-542, 2009.
- [18] D Biermann and M Steiner, "Analysis of Micro Burr Formation in Austenitic Stainless Steel," in *45th CIRP Conference on Manufacturing Systems 2012*, 2012, pp. 97-102.
- [19] Yong Tang et al, "Burr formation in milling cross-connected microchannels with a thin slotting cutter," *Precision Engineering*, vol. 35, pp. 108-115, 2011.
- [20] M Hashimura et al, "Effect of In-plane Exit Angle and Rake Angles on Burr Height and Thickness in Face Milling Operation," *Transactions of the ASME Journal of Manufacturing Science and Engineering*, vol. 121, no. 1, pp. 13-19, 1999.
- [21] Kushendarsyah Saptaji et al, "Effect of side edge angle and effective rake angle on top burrs in micro-milling," *Precision Engineering*, vol. 36, pp. 444-450, 2012.
- [22] Gwo-Lianq Chern, "Experimental observation and analysis of burr formation mechanisms in face milling of aluminum alloys," *International Journal of Machine Tools and Manufacture*, vol. 46, no. 12-13, pp. 1517 - 1525, October 2006.
- [23] Chih-Hsing Chu and David Dornfel, "Geometric Approaches for Reducing Burr Formation in Planar Milling By Avoiding Tool Exits," *Journal of Manufacturing Processes*, pp. 182-195, 2005.

# An Experimental Guideline to Manufacture Micro-Impeller using Micro-Milling Process

---

## ORIGINALITY REPORT

---

27%

SIMILARITY INDEX

22%

INTERNET SOURCES

19%

PUBLICATIONS

11%

STUDENT PAPERS

---

## PRIMARY SOURCES

---

1

[dosen.univpancasila.ac.id](http://dosen.univpancasila.ac.id)

Internet Source

6%

2

Submitted to Politecnico di Milano

Student Paper

2%

3

D.L. Zariatin, G. Kiswanto, T.J. Ko.

"Investigation of the micro-milling process of thin-wall features of aluminum alloy 1100", The International Journal of Advanced Manufacturing Technology, 2017

Publication

2%

4

[www.pe.kmutnb.ac.th](http://www.pe.kmutnb.ac.th)

Internet Source

1%

5

[delibra.bg.polsl.pl](http://delibra.bg.polsl.pl)

Internet Source

1%

6

Joel Fortgang. "Command shaping control for micro-milling operations", International Journal of Control Automation and Systems, 12/2011

Publication

1%

---

7	Submitted to Sabanci Universitesi Student Paper	1 %
8	<a href="http://www.inderscience.com">www.inderscience.com</a> Internet Source	1 %
9	<a href="http://academica-e.unavarra.es">academica-e.unavarra.es</a> Internet Source	1 %
10	Niknam, Seyed A., Walery Wygowski, Marek Balazinski, and Victor Songmene. "Milling Burr Formation and Avoidance", Machinability of Advanced Materials, 2014. Publication	1 %
11	<a href="http://staff.ui.ac.id">staff.ui.ac.id</a> Internet Source	1 %
12	HyungTae Kim, KiHyeong Song, YoungJae Choi, SungChul Kim. "An air-guided and fly-cutting system for biconic-Zernike surfaces", 2016 International Conference on Control, Decision and Information Technologies (CoDIT), 2016 Publication	1 %
13	<a href="http://repository.tudelft.nl">repository.tudelft.nl</a> Internet Source	1 %
14	<a href="http://journals.modares.ac.ir">journals.modares.ac.ir</a> Internet Source	1 %
15	<a href="http://www.mdpi.com">www.mdpi.com</a>	

16

Submitted to Cranfield University

Student Paper

1%

17

Fromentin, Guillaume. "Analysis and modeling of burr formation during the plane milling of cast aluminum alloy using PCD tools", Journal of Manufacturing Science and Engineering, 2016.

Publication

1%

18

D. Krahenbuhl, C Zwyssig, K. Bitterli, M. Imhof, J. W. Kolar. "Evaluation of ultra-compact rectifiers for low power, high-speed, permanent-magnet generators", 2009 35th Annual Conference of IEEE Industrial Electronics, 2009

Publication

1%

19

Submitted to University of Newcastle upon Tyne

Student Paper

1%

20

[www.scientific.net](http://www.scientific.net)

Internet Source

1%

21

Elisa Vázquez. "An experimental analysis of process parameters for the milling of micro-channels in biomaterials", International Journal of Mechatronics and Manufacturing Systems,

<1%



22

[ethesis.nitrkl.ac.in](http://ethesis.nitrkl.ac.in)

Internet Source

<1 %

---

23

G. Kiswanto, D.L. Zariatin, T.J. Ko. "The effect of spindle speed, feed-rate and machining time to the surface roughness and burr formation of Aluminum Alloy 1100 in micro-milling operation", Journal of Manufacturing Processes, 2014

Publication

<1 %

---

24

E. Brinksmeier. "Tool path generation for ultra-precision machining of free-form surfaces", Production Engineering, 09/2008

Publication

<1 %

---

25

[kip.bppt.go.id](http://kip.bppt.go.id)

Internet Source

<1 %

---

26

Douglas Maxwell, Shannon McArthur, William Hansen, Richard Bouchard, Ian Sears, Jack Higgs, Mark Webster. "U.S. deep-sea tsunameter network fully operational", OCEANS 2008, 2008

Publication

<1 %

---

27

[eprints.whiterose.ac.uk](http://eprints.whiterose.ac.uk)

Internet Source

<1 %

---

28

[vdmgroup.ru](http://vdmgroup.ru)

&lt;1 %

29

[repository.ntu.edu.sg](https://repository.ntu.edu.sg)

Internet Source

&lt;1 %

30

Tan, J.Y.. "Strategy for generalizing the development of alloy steel fuzzy model for machinability data selection", Journal of Materials Processing Tech., 20041130

Publication

&lt;1 %

31

[scholars.unh.edu](https://scholars.unh.edu)

Internet Source

&lt;1 %

32

NEWMAN ST. "CAD/CAM solutions for STEP-compliant CNC manufacture", International Journal of Computer Integrated Manufacturing, 1/1/2003

Publication

&lt;1 %

33

Burrs - Analysis Control and Removal, 2010.

Publication

&lt;1 %

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off

# An Experimental Guideline to Manufacture Micro-Impeller using Micro-Milling Process

## GRADEMARK REPORT

FINAL GRADE

/0

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4